


Entel

CSBHX (EE/ED) 6 WAY RAPID CHARGER

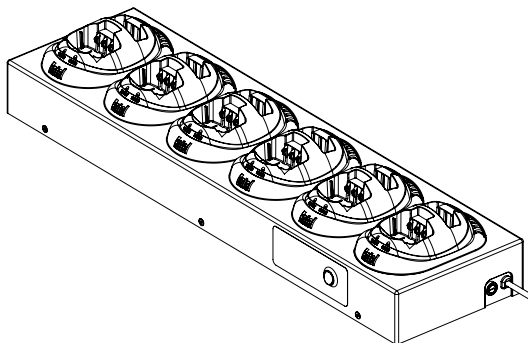

Note: the CSBHX is the direct replacement / upgrade of the CSB400E, and is compatible with the same products.

Copyright Entel UK 2008

v03/09

Thank you for purchasing the CSBHX charger. This product should reach you in perfect condition. Should you notice any defects or experience any problems with this product, please contact the dealer from whom you purchased it immediately.

FEATURES

The CSBHX charger provides rapid recharging of Lithium-Ion battery packs for the Entel HX400 series transceivers.

Free-range power supply facilitates both 100v and 240v AC outlets.

The HX400 series battery pack can be charged in the front slot of the dual-slot CSBHX charger while still attached to your HX400 transceiver, or, alternatively, on its own in the rear slot. Two battery packs may be inserted into the front and rear slots simultaneously, but the battery pack in the rear slot will only begin charging once the battery pack in the front slot has completed its charge cycle.

The time required to charge a fully discharged battery pack is 2 hours, 30mins.

When rapid charge is complete, the CSBHX automatically switches to standby.

This charger has been designed to sit on a desktop, or to be wall mounted.

OPERATING INSTRUCTIONS

1. Plug the AC power cord of the charger into a wall outlet.
2. Switch the transceiver off.
3. Insert the battery pack into the CSBHX, either with or without the transceiver attached. The LED illuminates red to indicate that charging has commenced.
4. A discharged battery pack will take approximately 2 hours, 30mins to fully charge. When charge is complete the LED will illuminate green.

NOTE: If the LED on your CSBHX flashes red this indicates that there is a fault with the battery pack. Please consult your dealer.

SPECIFICATION

Mains connection: EE version - 3 pin UK
ED version - 2 pin European

Input voltage: 100~240V AC 500mA

Output voltage: 8.4V DC 800mA

Charge time: 2 hours, 30mins

Dimensions: 65(H)mm x 630(W)mm x 180(D)mm


Weight: 5.64kg

Community Design Registration Pending
U.S Design Patent Pending
Unregistered Design Right Entel UK 2008
All Rights Reserved

Copyright Entel UK Ltd. London

BULK-HEAD MOUNTING

For your convenience the CSBHX can be bulkhead mounted

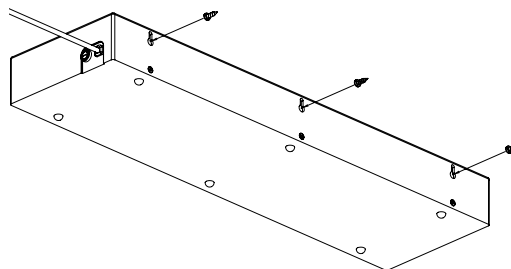

PRECAUTIONS

The CSBHX is designed exclusively for use with battery packs related to the Entel HX series. Do not use it to charge any other types of battery pack.

Do not use the CSBHX as a power supply.

The CSBHX is designed for use with an AC power supply voltage between 100v and 240v. Do not connect it to a power source outside this range.

Never charge the transceiver whilst it is switched on.

Unplug the CSBHX when it is not in use.

Do not dismantle the CSBHX.

Never insert any metal or any other conductive objects into the charger.

Do not touch the charger's terminals.

Never short the charge contacts with metal or any other conductive object.

The CSBHX should be placed in a well ventilated, dry area.



! In the event that your CSBHX gets wet, do not switch on. Consult your dealer immediately.